


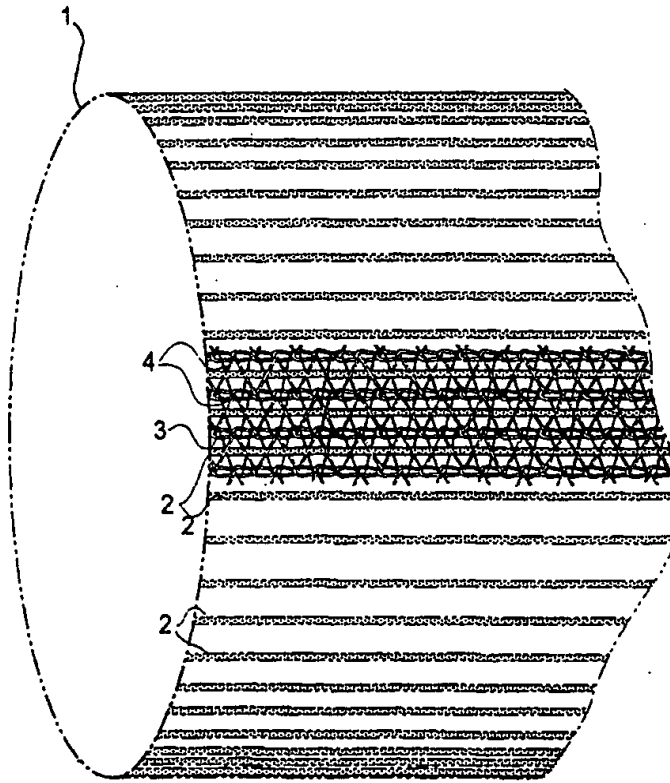

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : D06C 3/00, B29C 70/02, 70/16</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/63141</p> <p>(43) International Publication Date: 9 December 1999 (09.12.99)</p>
<p>(21) International Application Number: PCT/SE98/00901</p> <p>(22) International Filing Date: 15 May 1998 (15.05.98)</p> <p>(71) Applicant (for all designated States except US): ENG-TEX AB [SE/SE]; Falköpingsvägen 36, S-565 22 Mullsjö (SE).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): ENG, Torbjörn [SE/SE]; Björkängsvägen 31, S-565 32 Mullsjö (SE).</p> <p>(74) Agent: AWAPATENT AB; P.O. Box 11394, S-404 28 Göteborg (SE).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).</i></p>
<p>(54) Title: LAID-YARN FABRIC</p> <p>(57) Abstract</p> <p>The invention relates to a laid-yarn fabric serving as a reinforcement material in the manufacture of fibre composites, and comprising a connecting thread system and reinforcement threads (2) inserted into said thread system. The laid-yarn fabric forms a transversely elastic tube-like means (1) which is arranged to be passed over a core in order to form or to be comprised in said fibre composite. The invention likewise concerns a method of producing preforms for the manufacture of fibre composites, using such a transversely elastic, tube-like laid-yarn fabric. The laid-yarn fabric is applied on a core by the tube-like means (1) being passed over said core in such a manner that said tube-like means (1), on account of its transverse elasticity, drapes itself closely about said core. The laid-yarn fabric is then injected with thermosetting plastics, alternatively is heated, if the fabric is made from thermoplastic hybrid yarns.</p>  <p>The diagram illustrates a cross-section of a tube-like means (1) made of laid-yarn fabric. It shows multiple horizontal reinforcement threads (2) passing through the fabric. The fabric is formed by connecting threads (3 and 4) that create a mesh-like structure around the reinforcement threads. The tube-like means (1) is shown as a curved, flexible structure, indicating its transverse elasticity.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

LAIID-YARN FABRICField of Invention

The present invention relates to a laid-yarn fabric serving as a reinforcement material in the manufacture of fibre composites, and comprising a connecting thread system and reinforcement threads inserted into said thread system.

The invention likewise relates to a method of producing preforms for the manufacture of fibre composites according to which method the laid-yarn fabric is deposited on a core and is injected with thermosetting plastics, alternatively is heated, when the fabric is made from thermoplastic hybrid yarns.

15 Technical Background

In the manufacture of fibre composites it is known to use laid-yarn fabrics consisting of a connecting thread system in which are inserted reinforcement threads of e.g. polymer materials, metal or glass fibres or a mixture of such materials. To produce a fibre composite one or several laid-yarn fabrics are draped on a core and shaped to the core geometry, whereupon a thermosetting plastics is applied on the fabric or fabrics and allowed to set. Alternatively, when the fabric is made from a thermoplastic hybrid yarn, heat is supplied to the laid-yarn fabric. In both cases the reinforcement threads serve as reinforcement in the finished fibre composite. It is essential that the laid-yarn fabric is pliable and shape-adaptable so as to narrowly follow the contours of the core to ensure that the finished fibre composite will closely resemble the shape of the core.

A drawback found in prior-art laid-yarn fabrics is that they may be difficult to drape about a core of

irregular shape, such as an elongate shape comprising one or several protrusions or depressions.

This drawback is particularly noticeable in multi-axial laid-yarn fabrics, i.e. in laid-yarn fabrics comprising several layers of reinforcement threads running in different directions relative to one another. The multi-axial laid-yarn fabrics are advantageous inasmuch as they exhibit excellent tensile strength in all directions, but disadvantageous because of their poor drapability.

Summary of the Invention

The object of the invention thus is to provide a laid-yarn fabric exhibiting satisfactory drapability also with respect to irregularly shaped cores, and a method employing the inventive laid-yarn fabric in order to produce preforms for the manufacture of fibre composites. The object is also to provide a method by means of which satisfactory tensile strength in several directions is obtained in the composite formed on the core while at the same time the ability to closely imitate the shape of the core is maintained.

The first-mentioned object is achieved in accordance with the teachings of the invention by means of a laid-yarn fabric forming a transversely elastic tube-like means which is arranged to be passed over a core in order to form or to be comprised in said fibre composite. In the manufacture of a fibre composite by means of the inventive method the fabric is applied on the core in such a manner that the laid-yarn fabric, on account of its elasticity, drapes itself closely about the core.

Owing to the elasticity of the laid-yarn fabric in the transverse direction, the tube-like means clings closely to the core, adapting itself to and adopting the shape of the core without creasing, also when used on cores of irregular shapes.

In accordance with one embodiment of the laid-yarn fabric the reinforcement threads are arranged essentially in parallel with the longitudinal extension of the tube-like means.

5 In accordance with another embodiment, the reinforcement threads are arranged at an angle to the longitudinal extension of the tube-like means.

In accordance with yet another embodiment, the reinforcement threads run in a zigzag pattern in the
10 longitudinal extension of the tube-like means.

The maximum tensile strength of the fabric is in the direction of the reinforcement threads, for which reason these various embodiments offer possibilities of adaptation to different tensile-strength needs in different
15 directions relative to the longitudinal direction of the tube-like means.

In accordance with a fourth embodiment of the laid-yarn fabric the connecting thread system or the reinforcement threads consist of thermoplastic hybrid yarns.

20 A second embodiment of the inventive method consists of applying at least two laid-yarn fabrics, both in the form of elastic tube-like means, the reinforcement threads of which run at different angles to one another and at an angle to the longitudinal axis of the respective means, on top of one another such that the tube-like
25 means together form a multi-layer fabric wherein the reinforcement threads of one of the fabrics cross those of the other fabric about the core.

The multi-layer fabric applied on the core exhibit
30 the same advantages as a multiaxial fabric, because the reinforcement threads therein run in different directions relative to each other. In consequence of the tube-like means being applied on the core one by one, the pliancy and shape-adaptability properties of the inventive multi-
35 layer fabric are, however, greatly improved. The method provides a composite which exhibits tensile strength in

all or in desired directions, while retaining excellent properties of imitation of the core shape.

Brief Description of the Drawings

5 Fig. 1 illustrates the lay-out of the thread system and the reinforcement threads in accordance with one embodiment of the tube-like means of the invention.

10 Fig. 2 is a view on an enlarged scale of the arrangements of the thread system and the reinforcement threads according to this embodiment of the invention.

 Fig. 3 is a view, likewise on an enlarged scale, of the arrangements of the thread system and the reinforcement threads in accordance with a second embodiment of the invention.

15 Fig. 4 is a view, likewise on an enlarged scale, of the arrangements of the thread system and the reinforcement threads in accordance with a third embodiment of the invention.

20 Fig. 5 is a schematic representation of a laid-yarn fabric in accordance with the invention imagined to be passed over a core, the diameter of which varies along the core length.

Description of Preferred Embodiments

25 Fig. 1 illustrates one embodiment of the tube-like means in accordance with the invention. A laid-yarn fabric forms a tube-like, in the subject case cylindrical, elastic means 1, see also Fig. 2, constructed from reinforcement threads 2 and a connecting thread system consisting of wales 3 and interlacing threads 4. The reinforcement threads 2 are arranged so as to extend essentially in parallel with the longitudinal direction of the tube-like means 1 between the wales 3 that extend in the same direction as the threads 2, and they are
30 maintained in this inter-wale position by means of the interlacing threads 4.
35

Fig. 3 illustrates a part of a tubular means in accordance with another embodiment of the invention as deployed into a flattened condition. In this case, the connecting thread system of the fabric comprises
5 parallel, spaced apart wales 3 and interlacing threads 5, 6. In each space or gap between the wales 3 an optional number of reinforcement threads 2 may be inserted. In accordance with the embodiment shown in this drawing figure, two reinforcement threads 2 are chosen, like in
10 the first embodiment, said threads extending in parallel relationship with each other and with the wales 3. A bottom interlacing thread 5 extends in a zigzag pattern intermediate the wales 3 on one side of the reinforcement threads 2 and a top interlacing thread 6 extends in the
15 same zigzag pattern on the opposite side.

A laid-yarn fabric as constructed in accordance with Fig. 2 possesses the advantage of being of comparatively simple structure while at the same time imparting to the tube-like means manufactured from laid-yarn fabric,
20 satisfactory elasticity in the transverse direction, i.e. crosswise relative to the extension of the reinforcement threads 2. A laid-yarn fabric manufactured in accordance with the embodiment of Fig. 3, although requiring a larger number of stitch-forming machines (knitting
25 machines), offers the advantage of exhibiting increased flexibility.

Both reinforcement threads 2 of each pair of threads may consist of the same or of different materials, for example a polymer material, metal or glass fibres.

30 In an enlarged view, Fig. 4 shows the structure of a laid-yarn fabric in accordance with a third embodiment of the invention. In accordance with this embodiment it is the reinforcement threads 2 that run in a zigzag pattern to interlace the wales 3 that are disposed in parallel
35 relationship. In the tube-like means 1, this structure imparts reinforcement lengthwise as well as crosswise

while at the same time some movability is possible also lengthwise as a result of elongation of the wales 3.

All embodiments described in the foregoing provide elasticity properties crosswise owing to the arrangement of the reinforcement threads 2 and the connecting thread system.

An elastic, tube-like means 1 in accordance with the invention, as draped about a core having varying thickness in its lengthwise extension, is shown schematically in Fig. 5. In this drawing figure, the tube-like means 1 is illustrated by longitudinal lines indicating the directions of extension of the reinforcement threads. The tube-like means is assumed to be positioned on an elongate core which is configured with a pronounced inwardly curved middle portion. On account of the elasticity of the tube-like means 1 in the transverse direction, said means clings to core, narrowly following the outline of the latter, thus imitating the shape of the core in the desired manner.

Several modifications are possible within the scope of the invention as the latter is defined in the appended claims. The reinforcement threads 2 may be arranged in several different ways in the tube-like means 1. For example, their angle to the lengthwise direction of the tube-like means 1 could be varied as could also the manner in which these threads are inserted in and interlaced with the connecting thread system. Reinforcement threads 2 may be used on the entire external face of the means 1 or merely on part thereof. In addition, the basic shape of the tube-like means 1, instead of being cylindrical, could be conical or otherwise adapted to the shape of the core. The elasticity of the means 1 could be achieved either by means of an elastic material, inserted into the fabric, or as a result of the very design of the connecting thread system.

CLAIMS

1. A laid-yarn fabric intended as a reinforcement material in the manufacture of fibre composites, and comprising a connecting thread system and reinforcement threads (2) inserted into said thread system, c h a r -
a c t e r i s e d in that the laid-yarn fabric forms a transversely elastic tube-like means (1) which is arranged to be passed over a core in order to form or to be
10 comprised in said fibre composite.

2. A laid-yarn fabric as claimed in claim 1, c h a r a c t e r i s e d in that the reinforcement threads (2) are arranged essentially in parallel with the longitudinal extension of the tube-like means (1).

15 3. A laid-yarn fabric as claimed in claim 1, c h a r a c t e r i s e d in that the reinforcement threads (2) are arranged at an angle to the longitudinal extension of the tube-like means (1).

4. A laid-yarn fabric as claimed in claim 3, c h a r a c t e r i s e d in that the reinforcement threads (2) run in a zigzag pattern in the longitudinal extension of the tube-like means (1).

20 5. A laid-yarn fabric as claimed in claims 1-4, c h a r a c t e r i s e d in that the connecting thread system and/or the reinforcement threads (2) consists of a thermoplastic hybrid yarn.

6. A method of producing preforms for the manufacture of fibre composites according to which method a laid-yarn fabric is deposited on a core and is injected
30 with thermosetting plastics, alternatively is heated, if the fabric is made from thermoplastic hybrid yarns, c h a r a c t e r i s e d by applying the laid-yarn fabric in the form of a transversely elastic, tube-like means (1) having reinforcement threads (2) inserted
35 therein on the core by passing the tube-like means (1) over said core in such a manner that said tube-like means

(1), on account of its transverse elasticity, drapes itself closely about said core.

7. A method as claimed in claim 6, c h a r a c -
t e r i s e d by applying at least two laid-yarn
5 fabrics, both in the form of elastic tube-like means (1),
the reinforcement threads (2) of which run at different
angles to one another and at an angle to the longitudinal
axis of the respective means (1), on top of one another
such that the tube-like means (1) together form a multi-
10 layer fabric wherein the reinforcement threads (2) of one
of the tube-like means (1) cross those (2) of the other
means (1) about the core.

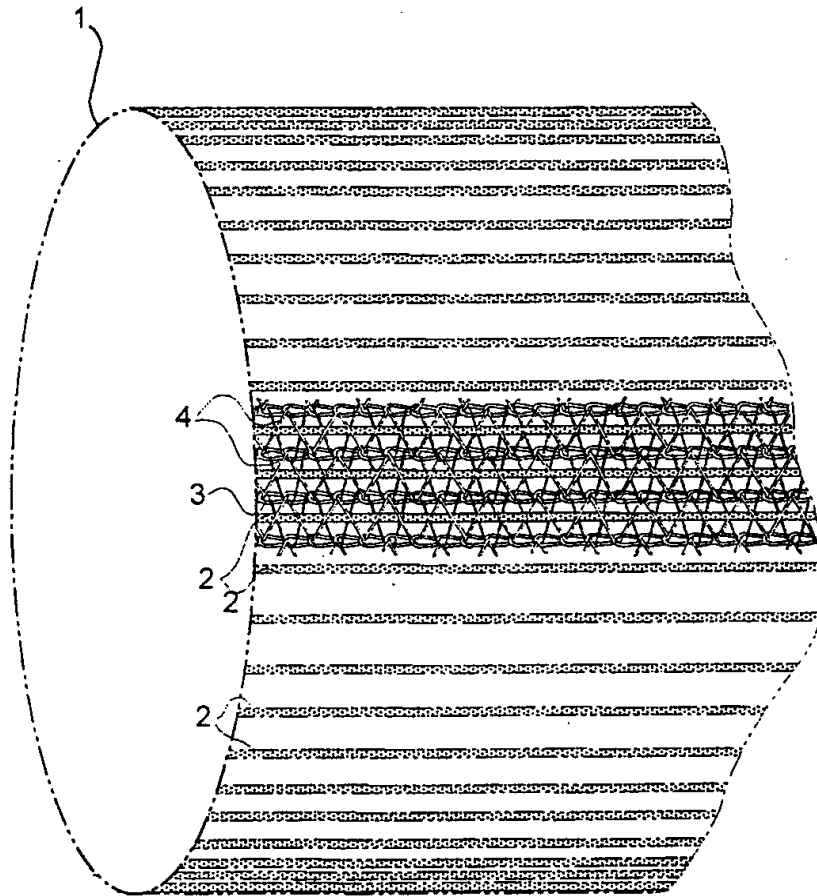


Fig. 1

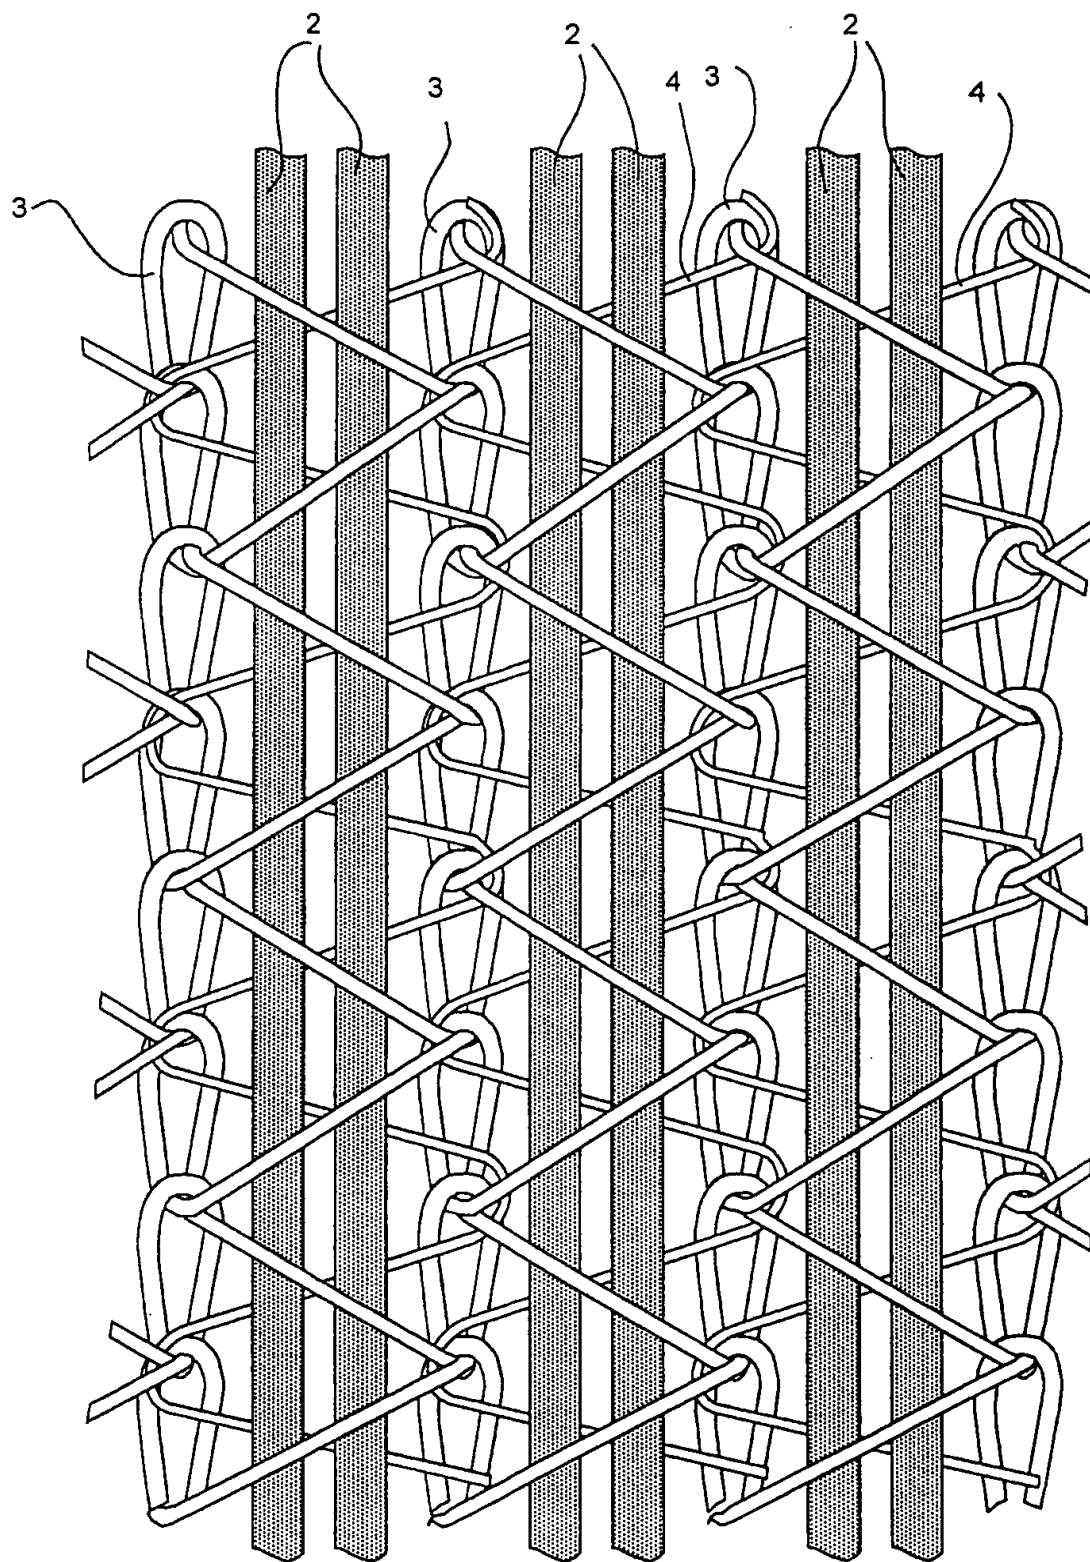


Fig. 2

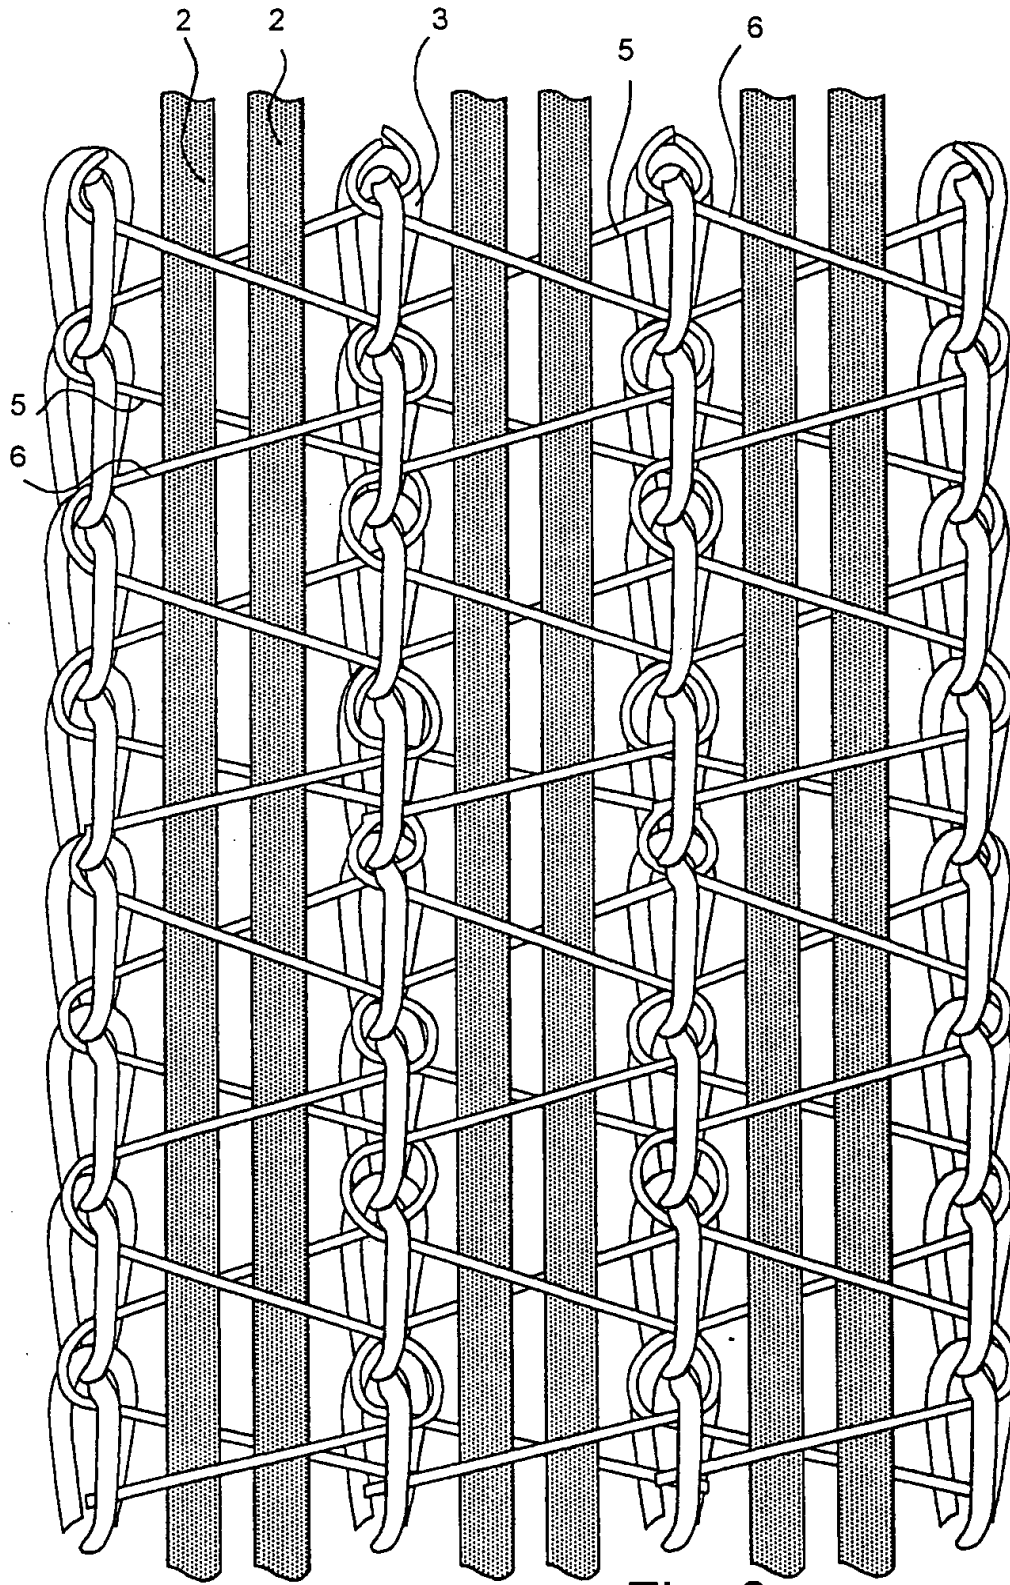


Fig. 3

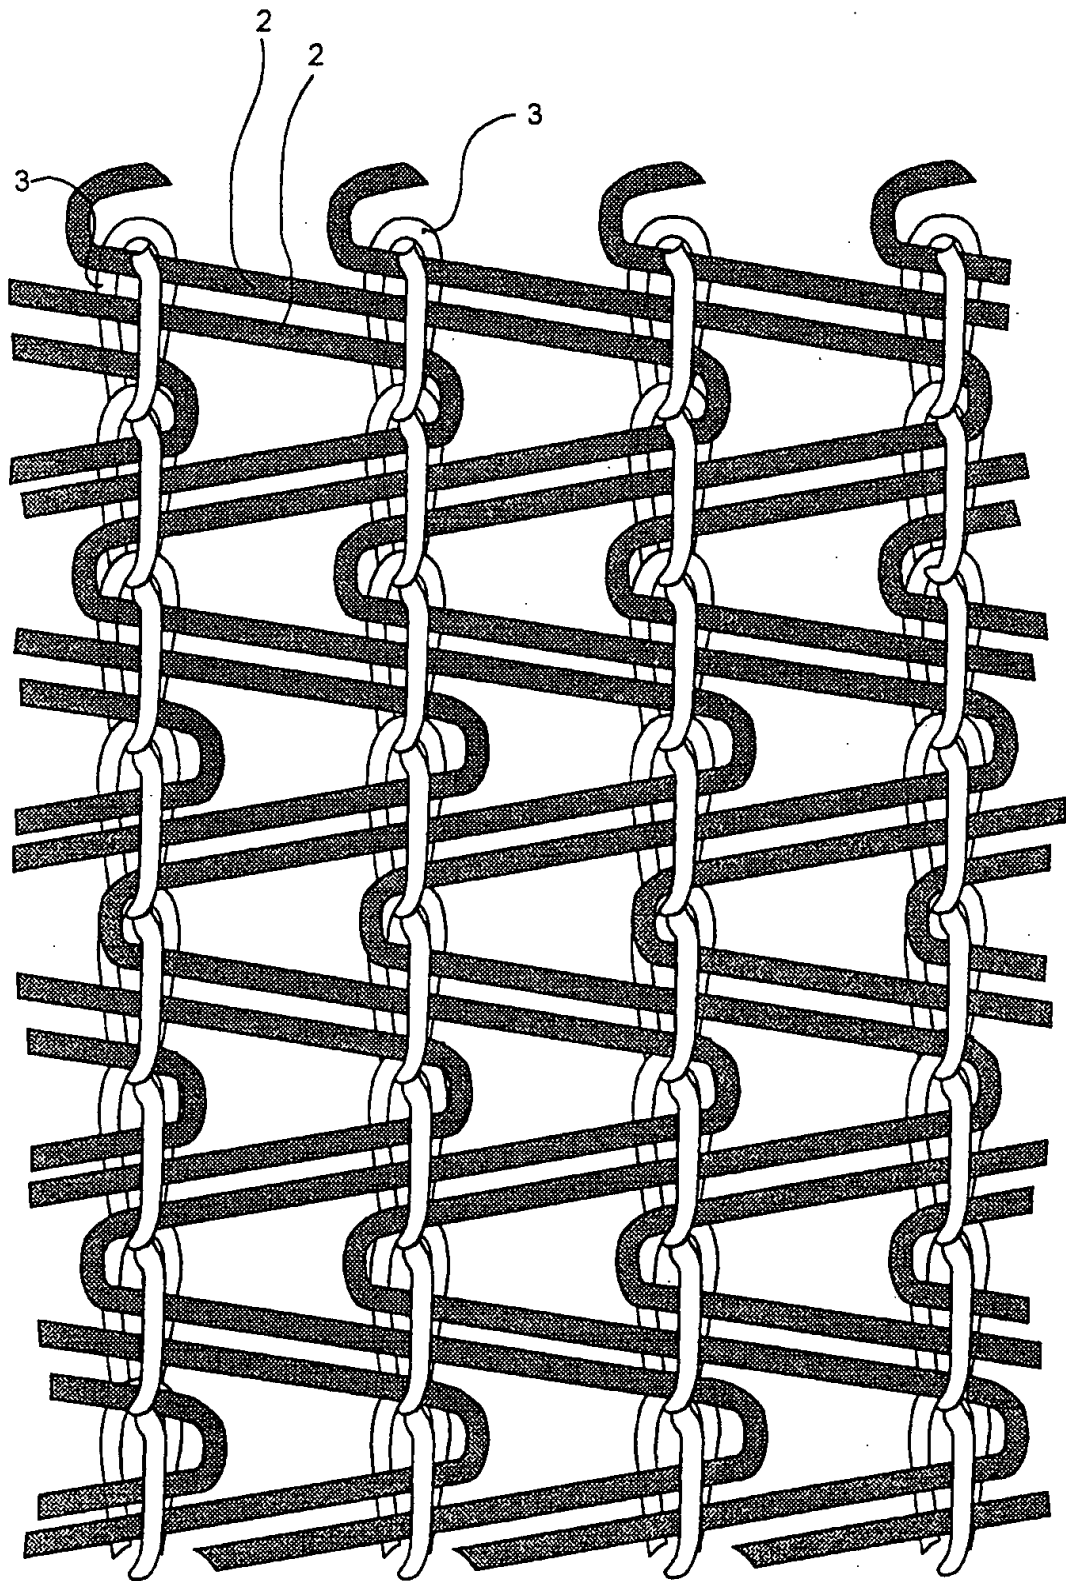


Fig. 4

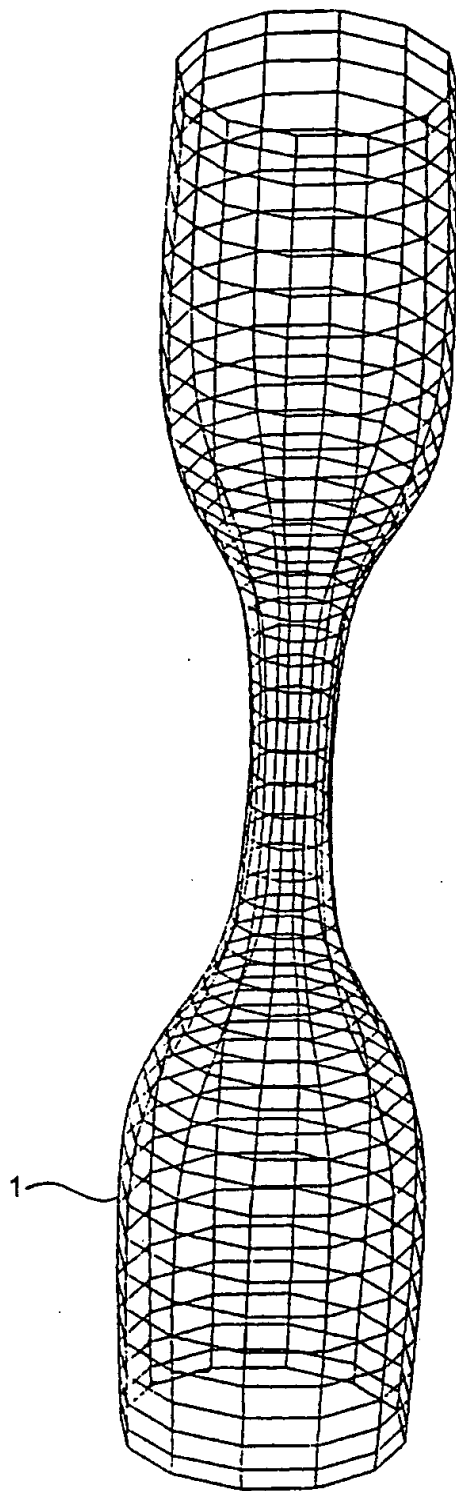


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/00901

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: D06C 3/00, B29C 70/02, B29C 70/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B29C, D06C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4774042 A (H.-D. BECKMANN), 27 August 1988 (27.08.88), figure, abstract --	1,2,6
Y	US 3007497 A (S.M. SHOBERT), 7 November 1961 (07.11.61), figure 3 --	1,2,6
A	EP 0442092 A2 (MAN TECHNOLOGIE AKTIENGESELLSCHAFT), 21 August 1991 (21.08.91) --	1,2,6
A	US 4777859 A (W.A. PLUMMER, JR.), 18 October 1988 (18.10.88) --	1,2,6



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"H" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 January 1999

Date of mailing of the international search report

20 -10- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Johan Löfstedt

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/00901

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WD 9211128 A1 (ALLIED-SIGNAL INC.), 9 July 1992 (09.07.92) --	1,2,6
A	US 5619903 A (C.W. ROGERS ET AL), 15 April 1997 (15.04.97) --	1,2,6
A	EP 0839941 A1 (AEROSPATIALE SOCIETE NATIONALE INDUSTRIELLE), 6 May 1998 (06.05.98) -- -----	1,2,6

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE 98/00901

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4774042 A	27/08/88	DE 3617248 A,C	12/03/87
US 3007497 A	07/11/61	NONE	
EP 0442092 A2	21/08/91	AT 122962 T	15/06/95
		DE 4004473 A	22/08/91
		DE 4124015 A	28/01/93
		DE 59009143 D	00/00/00
		EP 0523471 A	20/01/93
		ES 2072358 T	16/07/95
US 4777859 A	18/10/88	AU 3191884 A	21/03/85
		CA 1248375 A	10/01/89
		EP 0134864 A	27/03/85
		JP 60065194 A	13/04/85
		US 4741087 A	03/05/88
WO 9211128 A1	09/07/92	AU 8539591 A	22/07/92
		DE 69111617 D	00/00/00
		EP 0564455 A,B	13/10/93
		JP 7004879 B	25/01/95
		US 5101556 A	07/04/92
		US 5154109 A	13/10/92
US 5619903 A	15/04/97	CA 2205905 A	06/06/96
		EP 0795054 A	17/09/97
		JP 10510012 T	29/09/98
		WO 9617120 A	06/06/96
EP 0839941 A1	06/05/98	CA 2217440 A	01/04/98
		FR 2753993 A,B	03/04/98
		JP 10131010 A	19/05/98